


LIGHTCASSO™



LCS-D1
Team Version



LCS-M
Controller



LCS-D2
Single Version



Front



Rear



Front



Rear



Front





Rear

Introduction

Lightcasso is an easy-to-use projection mapping system. The Lightcasso Web Client provides a full 3D edit environment for efficiently setting up a projection mapping. LCS-D1/LCS-D2 output appropriate contents on target objects from connected projector. Moreover, user can manage multiple LCS-D1 to perform a cooperated projection mapping with Lightcasso controller LCS-M.


Features

- User friendly web user interface with 3D environment editing
- Content management for playlist setup
- Playback synchronization
- Support up to one month pre-schedule playback
- Network management
- Manage maximum 10 devices via one controller (LCS-M)
- Autoplay after saved setting

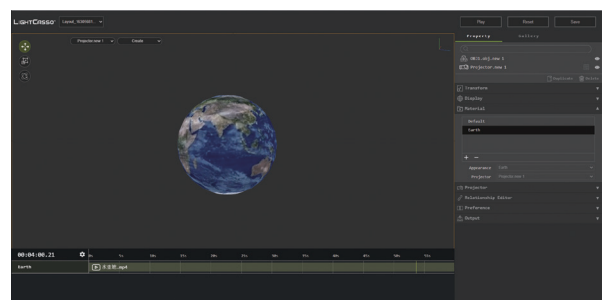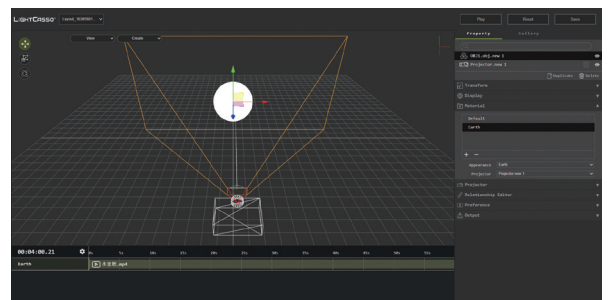


Diagram

LCS-D2 (Single Version)

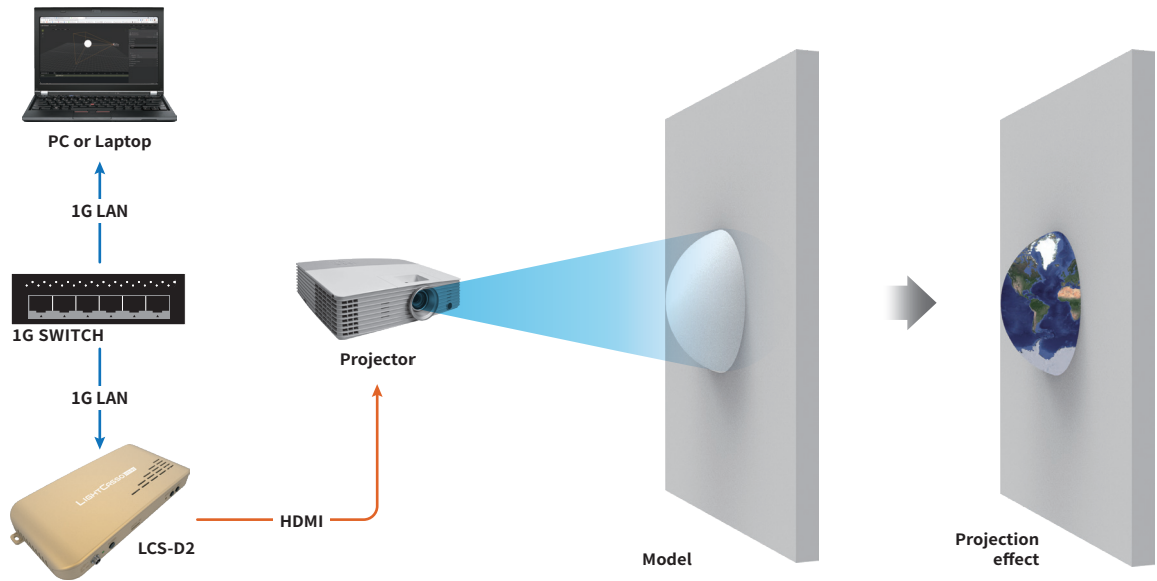

LDS-D1 (Team Version) & LSC-M (Controller)

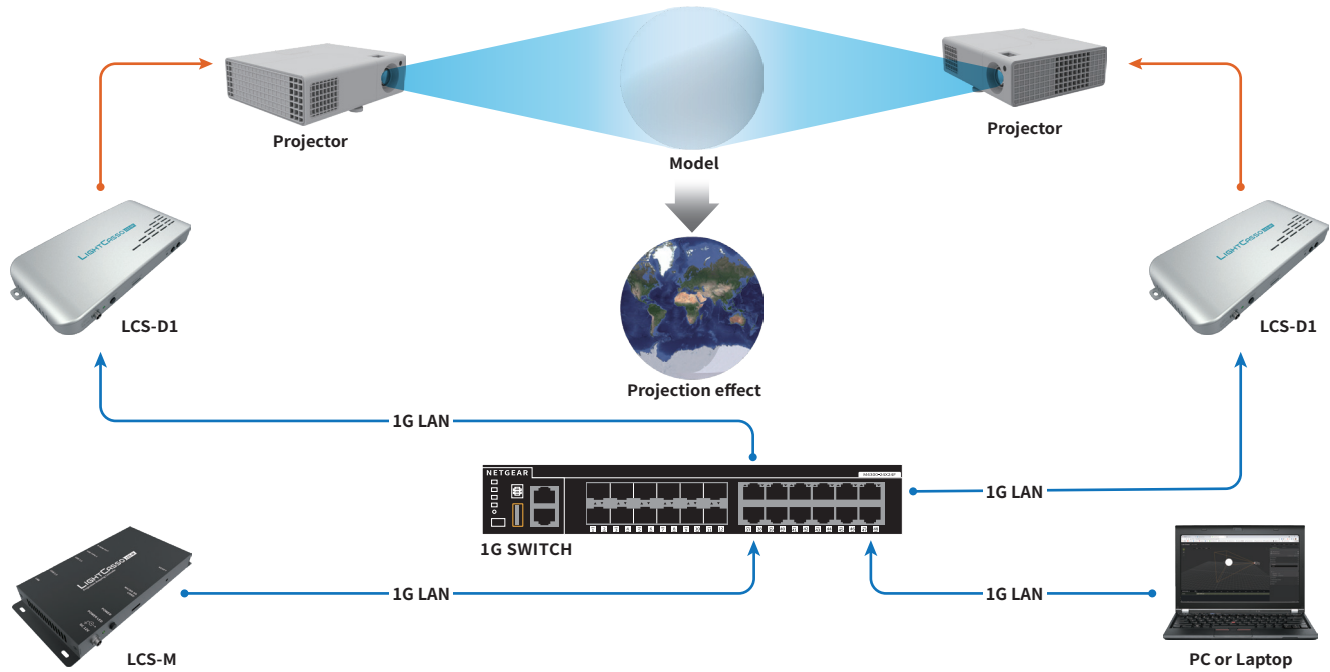

Specifications

Function	LCS-D1/LCS-D2	LCS-M
Resolutions	3840 x 2160 (16:9, 4K at 60 FPS)	3840 x 2160 (16:9, 4K at 60 FPS)
Display	HDMI 2.0 Output 4K/60Hz	HDMI 2.0 Output 4K/60Hz
Internal Storage	32GB High Speed eMMC	32GB High Speed eMMC
External Storage	microSD Card support USB 2.0 external storage x2 USB 3.0 external storage M.2 2280 PCIe NVMe SSD	microSD Card support USB 2.0 external storage x2 USB 3.0 external storage
Memory	4GB Dual-Channel DDR3	4GB Dual-Channel DDR3
Audio	Analog audio output S/PDIF audio output	/
Connectivity	Wi-Fi 2.4 GHz / 5 GHz dual-band Wi-Fi, support 802.11 a/b/g/n/ac, 2x2 MIMO Bluetooth 4.1 (support BLE) Ethernet 100/1000Mbps	Ethernet 100/1000Mbps
Power Supply	100~240V AC, 50/60 Hz, DC input: 12V@2A	100~240V AC, 50/60 Hz, DC input: 12V@2A