

40M HDBaseT™ 3.0 HDMI & Wall Plate Extender


4K60
4:4:4

USB Type-C

HDMI 2.0


Wall Plate

- Extend uncompressed 4K/60Hz 4:4:4 HDMI, USB 2.0, and IR to 40 meters over a Cat 6a U/FTP 23AWG cable
- Switch between USB type-C and HDMI video sources with an illuminated push button
- Power over Cable (PoC) ON/OFF function
- Powered by HDBaseT™ 3.0 Technology
- HDMI 1.4/2.0 (HDR) compliant
- HDCP 1.4/2.2/2.3 compliant
- USB type-C video input (DisplayPort 1.2 Alternate Mode)
- USB 2.0 HOST extender
- 2-Gang Wall Plate
- Compatible with a wide range of AV LINK's HDBaseT™ products, including HDM-3MXC, HDM-3MXCU, and HDM-3MXCU+

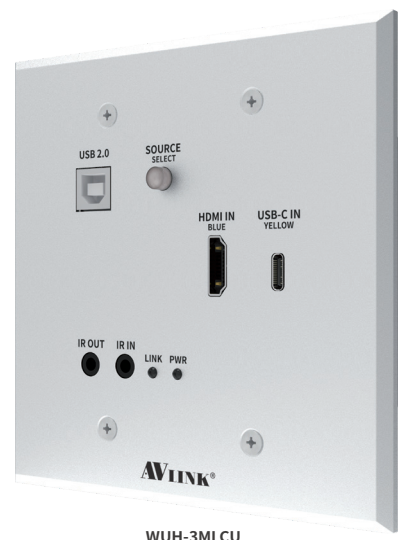

WUH-3MLCU

◆ Diagram

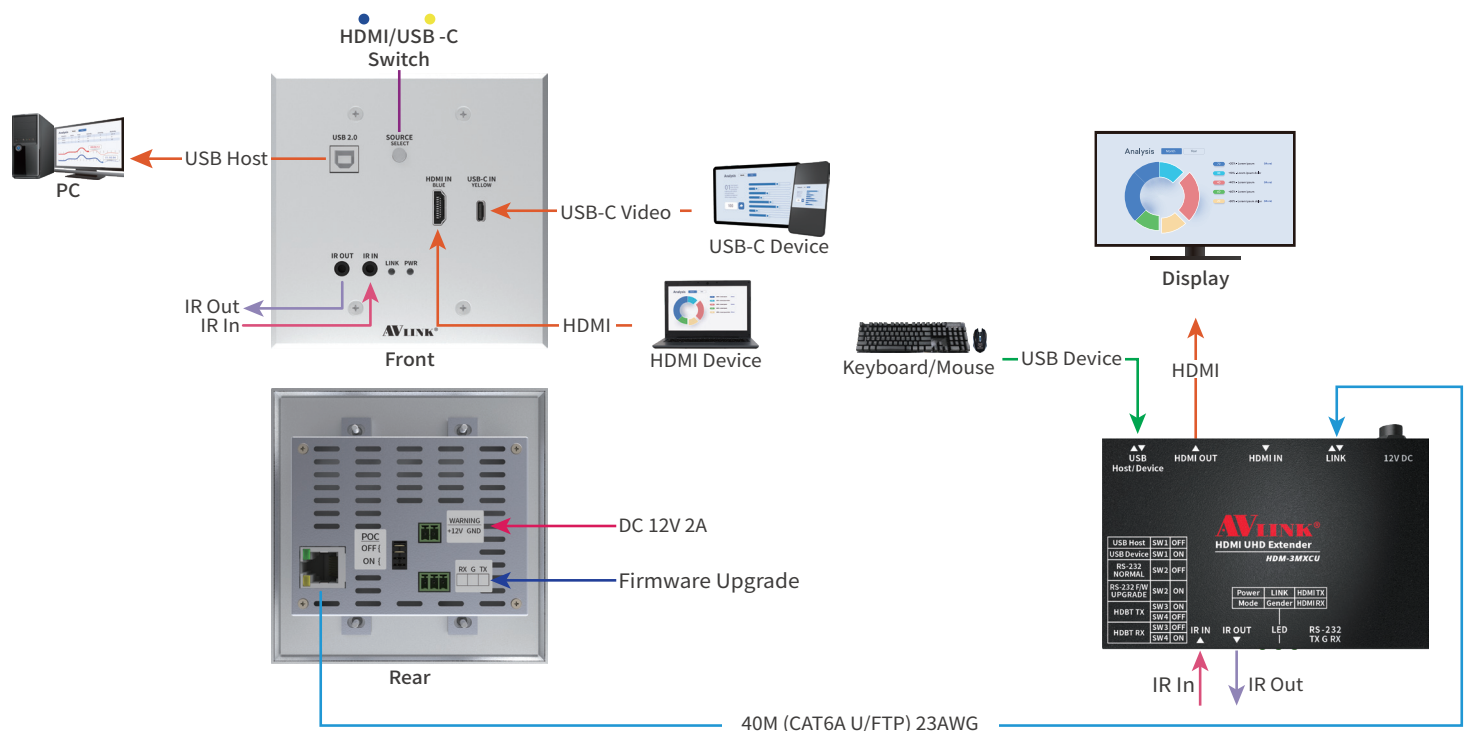

◆ Specifications

Product Name	WUH-3MLCU
Cable Distance	40M (CAT6A U/FTP)
USB Type B	USB 2.0 (Host)
HDMI In Connector	HDMI A-Type Female x 1
USB type-C In Connector	USB type-C Female x 1
Control Port	RJ-45 Connector x 1
RS-232 Connector	1X3 Pole Captive Screw Socket x 1
IR OUT	3.5 ψ Stereo Jack x 1
IR IN	3.5 ψ Stereo Jack x 1
Source Selection (HDMI/USB type-C)	Illuminated Push Button X1 (Blue/Yellow)
Max. Resolution	4K/60Hz 4:4:4
Power Adapter (Min.)	DC 12V 2A (1x2 Pole Captive Screw Socket)
Power Consumption (with PoC)	22W (Max.) / 2W (Stand by)
Housing	Metal
Net Weight	300g
Dimensions (L x W x H)	120 x 120 x 37.5 mm



AVLINK
The Highest Quality AV Solutions

TEL : +886 2-8226-2268
FAX : +886 2-8226-2269

Web : www.avlinksystem.com
Email : sales@cctch.com.tw

40M HDBaseT™ 3.0 HDMI & Wall Plate Extender

4K60
4:4:4

USB Type-C

HDMI 2.0


Wall Plate

- Extend uncompressed 4K/60Hz 4:4:4 HDMI, USB 2.0, and IR to 40 meters over a Cat 6a U/FTP 23AWG cable
- Switch between USB type-C and HDMI video sources with two illuminated push buttons
- Power over Cable (PoC) ON/OFF function
- Powered by HDBaseT™ 3.0 Technology
- HDMI 1.4/2.0 (HDR) compliant
- HDCP 1.4/2.2/2.3 compliant
- USB type-C video input (DisplayPort 1.2 Alternate Mode)
- USB 2.0 HOST extender
- Compatible with a wide range of AV LINK's HDBaseT™ products, including HDM-3MXC, HDM-3MXCU, and HDM-3MXCU+



WUH2-3MLCU

◆ Diagram

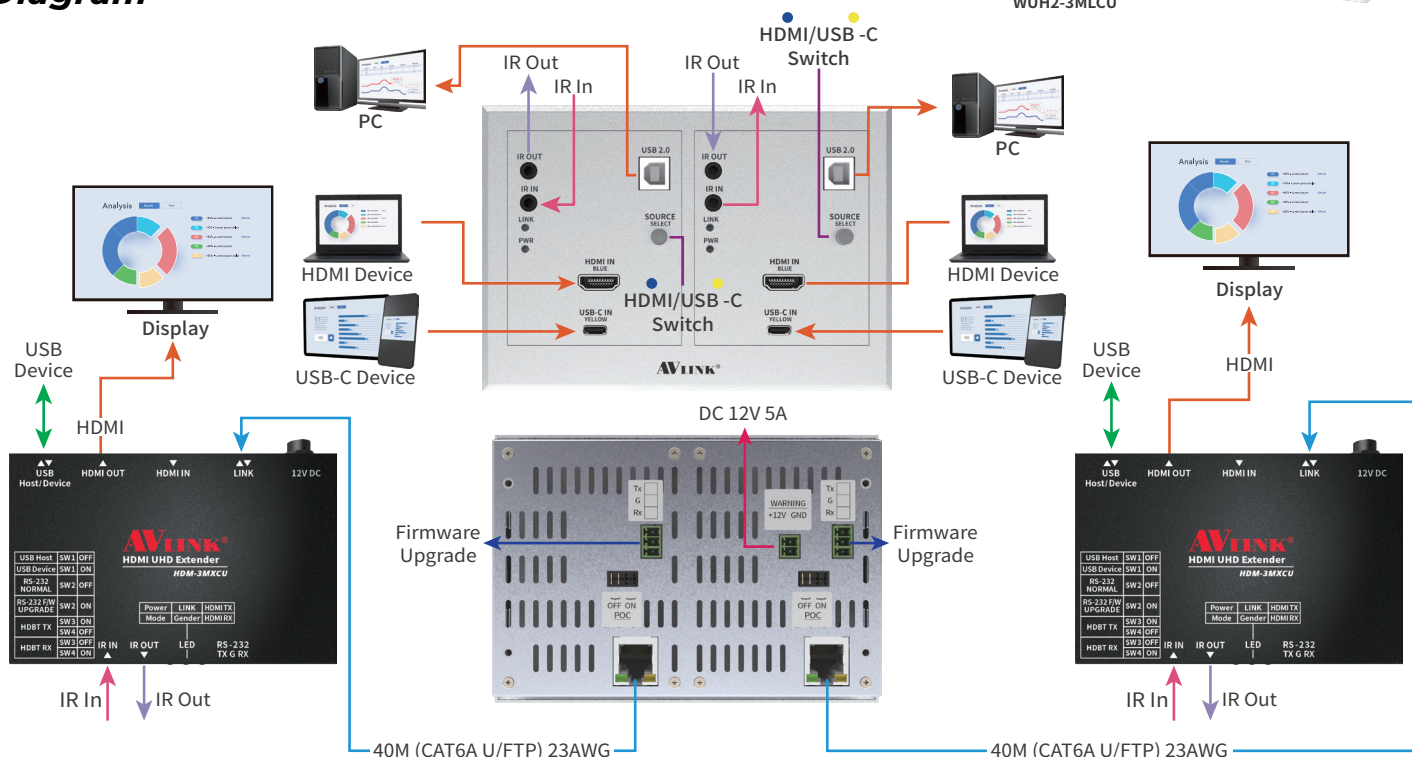

◆ Specifications

Product Name	WUH2-3MLCU
Cable Distance	40M (CAT6A U/FTP)
USB Type B	USB 2.0 (Host) x 2
HDMI In Connector	HDMI A-Type Female x 2
USB type-C In Connector	USB type-C Female x 2
Control Port	RJ-45 Connector x 2
RS-232 Connector	1X3 Pole Captive Screw Socket x 2
IR OUT	3.5 ϕ Stereo Jack x 2
IR IN	3.5 ϕ Stereo Jack x 2
Source Selection (HDMI/USB type-C)	Illuminated Push Button X2 (Blue/Yellow)
Max. Resolution	4K/60Hz 4:4:4
Power Adapter (Min.)	DC 12V 5A (1x2 Pole Captive Screw Socket)
Power Consumption (with PoC)	45W (Max.) / 3.5W (Stand by)
Housing	Metal
Net Weight	470g
Dimensions (L x W x H)	155 x 108 x 37.6 mm



AVLINK
The Highest Quality AV Solutions

TEL : +886 2-8226-2268
FAX : +886 2-8226-2269

Web : www.avlinksystem.com
Email : sales@cctch.com.tw